ELLISSE PENDANT MAJOR

Federico Palazzari

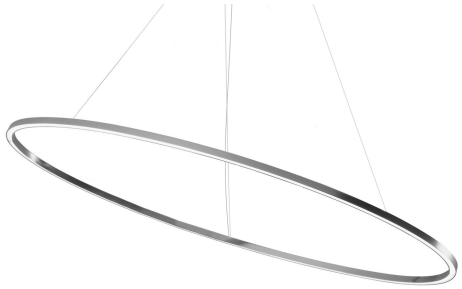

LED pendant provides diffused orientable uplight or downlight. Made from extruded aluminum in different finishes: matt lacquered white, black or gold, or polished in natural or gold. Equipped with an opal diffuser. The lamps are made using a proprietary extrusion coupling technology.

DOWNLIGHT 2700K



LAMPING

Source	linear LED
Total power	85W
Emission	diffused orientable
Switching	dimmable 1-10V
Tension	120V
Color temperature	2700K
Luminous flux	2650lm (luminous output)
Typ CRI	85
Energy class	A+
IP class	20
Dimensions	53.1 x 27.6 x 0.8
Materials	Aluminum + PC
Notes	adjustable cable length max 8.2', DALI version on request
Net lamp weight	11 lbs

Codes	*Structure*
ELP LW2 54	white
ELP LN2 54	black
ELP LO2 54	gold painted
ELP LL2 54	polished aluminum
ELP LGW 54	gold polished anodized

PACKAGE

Package 01	Dimension: 31.5 x 59.1 x 5.9 inches / Gross weight: 16.5 lbs

Certificazioni

Intertek

DOWNLIGHT 3000K



LAMPING

Source	linear LED
Total power	85W
Emission	diffused orientable
Switching	dimmable 1-10V
Tension	120V
Color temperature	3000K
Luminous flux	2650lm (luminous output)
Typ CRI	85
Energy class	A+
IP class	20
Dimensions	53.1 x 27.6 x 0.8
Materials	Aluminum + PC
Notes	adjustable cable length max 8.2', DALI version on request
Net lamp weight	11 lbs

Codes	*Structure*
ELP LWW 54	white
ELP LNW 54	black
ELP LOW 54	gold painted
ELP LLW 54	polished aluminum

PACKAGE

Package 01	Dimension: 31.5 x 59.1 x 5.9 inches / Gross weight: 16.5 lbs

Certificazioni

Intertek

UPLIGHT 2700K



LAMPING

Source	linear LED
Total power	85W
Emission	diffused orientable
Switching	dimmable 1-10V
Tension	120V
Color temperature	2700K
Luminous flux	2650lm (luminous output)
Typ CRI	85
Energy class	A+
IP class	20
Dimensions	53.1 x 27.6 x 0.8
Materials	Aluminum + PC
Notes	adjustable cable length max 8.2', DALI version on request
Net lamp weight	11 lbs

Codes	*Structure*
ELP LW2 53	white
ELP LN2 53	black
ELP LO2 53	gold painted
ELP LL2 53	polished aluminum
ELP LGW 53	gold polished anodized

PACKAGE

Package 01	Dimension: 31.5 x 59.1 x 5.9 inches / Gross weight: 16.5 lbs

Certificazioni

Intertek

UPLIGHT 3000K



LAMPING

Source	linear LED
Total power	85W
Emission	diffused orientable
Switching	dimmable 1-10V
Tension	120V
Color temperature	3000K
Luminous flux	2650lm (luminous output)
Typ CRI	85
Energy class	A+
IP class	20
Dimensions	53.1 x 27.6 x 0.8
Materials	Aluminum + PC
Notes	adjustable cable length max 8.2', DALI version on request
Net lamp weight	11 lbs

Codes	*Structure*
ELP LWW 53	white
ELP LNW 53	black
ELP LOW 53	gold painted
ELP LLW 53	polished aluminum

PACKAGE

Package 01	Dimension: 31.5 x 59.1 x 5.9 inches / Gross weight: 16.5 lbs

Certificazioni

Intertek