ELLISSE PENDANT TRIPLE

Federico Palazzari

LED pendant provides diffused orientable light. Made from extruded aluminum in different finishes: matt lacquered white, black or gold, or polished in natural or gold. Equipped with an opal diffuser. The lamps are made using a proprietary extrusion coupling technology.

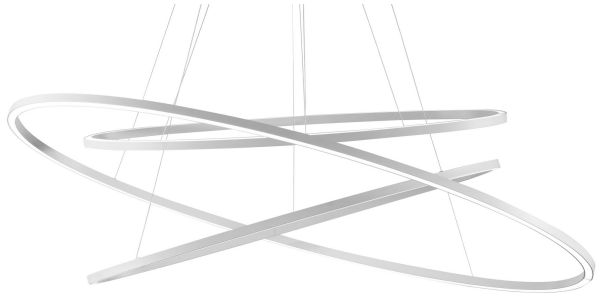

LED 2700K

LAMPING

Source	linear LED
Total power	70W
Emission	diffused orientable uplight(minor), diffused orientable downlight (major/minor)
Switching	dimmable 1-10V
Tension	120V
Color temperature	2700K
Luminous flux	1050+1630+1050lm (luminous output)
Typ CRI	85
Energy class	A+
IP class	20
Dimensions	53.2 x 27.6 x 8
Materials	Aluminum + PC
Notes	adjustable cable length 8.2' max, DALI version on request

Codes	*Structure*
ELP LW2 57	white
ELP LN2 57	black
ELP LL2 57	polished aluminum
ELP LO2 57	gold painted
ELP LGW 57	gold polished anodized

PACKAGE

Package 01	Dimension: 31.5 x 59.1 x 5.9 inches / Gross weight: 16.5 lbs

Certificazioni

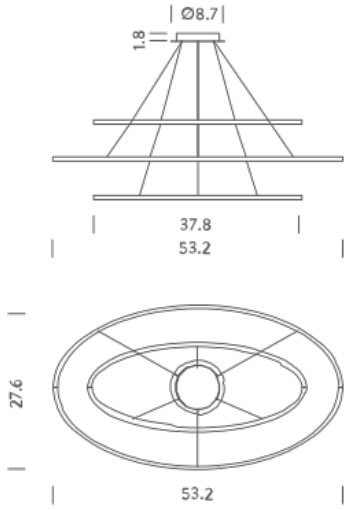

LED 3000K

LAMPING

Source	linear LED
Total power	70W
Emission	diffused orientable uplight(minor), diffused orientable downlight (major/minor)
Switching	dimmable 1-10V
Tension	120V
Color temperature	3000K
Luminous flux	1050+1630+1050lm (luminous output)
Typ CRI	85
Energy class	A+
IP class	20
Dimensions	53.2 x 27.6 x 8
Materials	Aluminum + PC
Notes	adjustable cable length 8.2' max, DALI version on request

Codes	*Structure*
ELP LWW 57	white
ELP LNW 57	black
ELP LLW 57	polished aluminum
ELP LOW 57	gold painted

PACKAGE

Package 01	Dimension: 31.5 x 59.1 x 5.9 inches / Gross weight: 16.5 lbs

Certificazioni
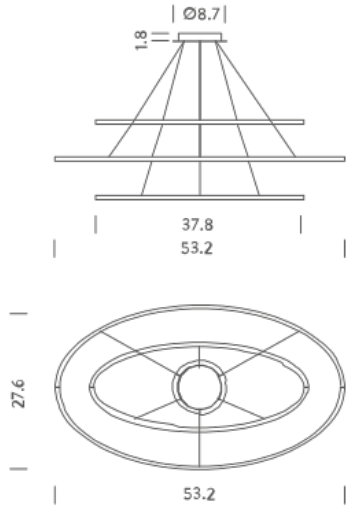
Intertek