LINESCAPES

PENDANT HORIZONTAL

Pendant lamp with an efficient highly versatile linear luminous output. Body in extruded aluminum and opal white polycarbonate diffuser.

L51 2700K

LAMPING

Source	linear LED
Total power	32W
Emission	diffused orientable 360°
Switching	dimmable 0-10V
Tension	120V
Color temperature	2700K
Luminous flux	840lm (luminous output)
Typ CRI	85
Energy class	A+
IP class	44
Dimensions	51.2 x 0.8
Materials	Aluminum + PC + ABS
Notes	metal cable length 9.9', electrical cable length 16.4', orientable 360°, decentralized canopy, DALI version on request

Codes	*Structure*
LIN LW2 5D	white
LIN LN2 5D	black

PACKAGE

Package 01	Dimension: 25.6 x 7.1 x 9.1 inches / Gross weight: 5.5 lbs
Package 02	Dimension: 43.4 x 2 x 2 inches / Gross weight: 2.2 lbs

Certificazioni

Intertek

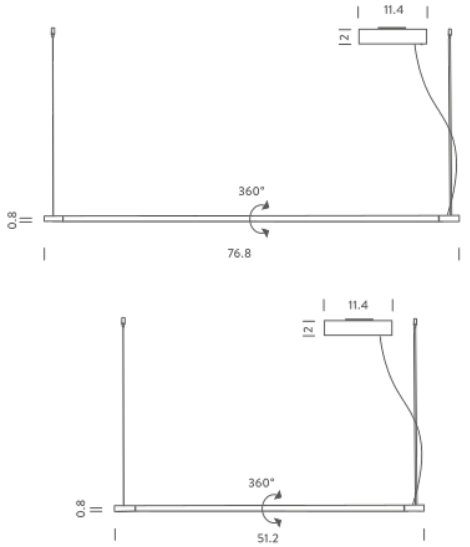

L51 3000K

LAMPING

Source	linear LED
Total power	32W
Emission	diffused orientable 360°
Switching	dimmable 0-10V
Tension	120V
Color temperature	3000K
Luminous flux	840lm (luminous output)
Typ CRI	85
Energy class	A+
IP class	44
Dimensions	51.2 x 0.8
Materials	Aluminium + PC + ABS
Notes	metal cable length 9.9', electrical cable length 16.4', orientable 360°, decentralized canopy, DALI version on request

Codes	*Structure*
LIN LWW 5D	white
LIN LNN 5D	black

PACKAGE

Package 01	Dimension: 25.6 x 7.1 x 9.1 inches / Gross weight: 5.5 lbs
Package 02	Dimension: 43.4 x 2 x 2 inches / Gross weight: 2.2 lbs

Certificazioni

Intertek

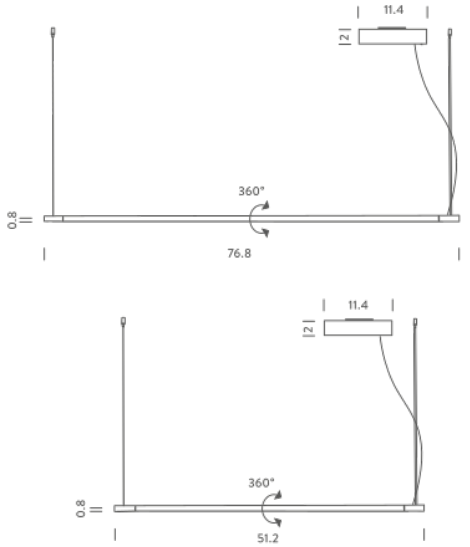

L77 2700K

LAMPING

Source	linear LED
Total power	48W
Emission	diffused orientable 360°
Switching	dimmable 0-10V
Tension	120V
Color temperature	2700K
Luminous flux	1430lm (luminous output)
Typ CRI	85
Energy class	A+
IP class	44
Dimensions	76.8 x 0.8
Materials	Aluminium + PC + ABS
Notes	metal cable length 9.9', electrical cable length 16.4', orientable 360°, decentralized canopy, DALI version on request

Codes	*Structure*
LIN LW2 5E	white
LIN LN2 5E	black

PACKAGE

Package 01	Dimension: 25.6 x 7.1 x 9.1 inches / Gross weight: 5.5 lbs
Package 02	Dimension: 68.9 x 2 x 2 inches / Gross weight: 2.2 lbs

Certificazioni

Intertek

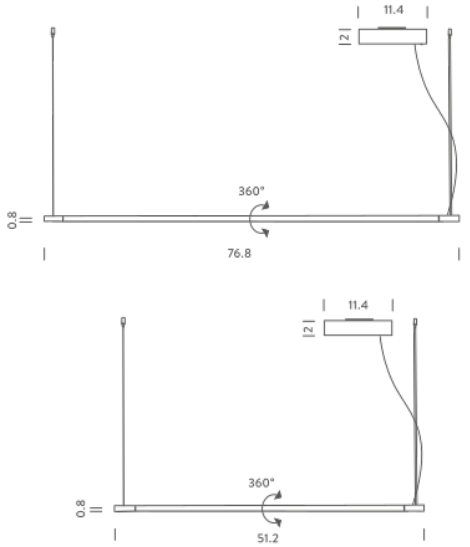

L77 3000K

LAMPING

Source	linear LED
Total power	48W
Emission	diffused orientable 360°
Switching	dimmable 0-10V
Tension	120V
Color temperature	3000K
Luminous flux	1430lm (luminous output)
Typ CRI	85
Energy class	A+
IP class	44
Dimensions	76.8 x 0.8
Materials	Aluminium + PC + ABS
Notes	metal cable length 9.9', electrical cable length 16.4', orientable 360°, decentralized canopy, DALI version on request

Codes	*Structure*
LIN LWW 5E	white
LIN LNN 5E	black

PACKAGE

Package 01	Dimension: 25.6 x 7.1 x 9.1 inches / Gross weight: 5.5 lbs
Package 02	Dimension: 68.9 x 2 x 2 inches / Gross weight: 2.2 lbs

Certificazioni
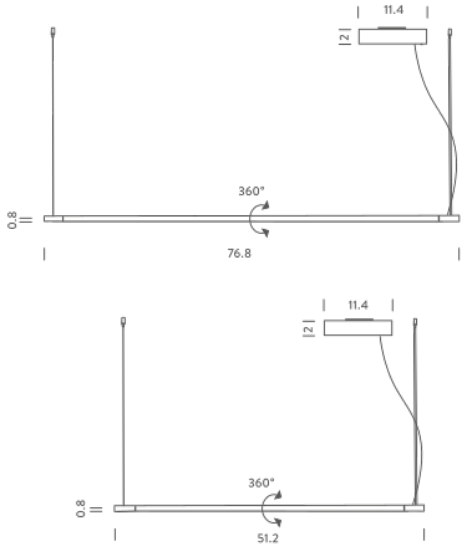
Intertek