SPIGOLO PENDANT HORIZONTAL

Studiocharlie

Pendant lamp based on an extruded and tubular aluminum structure, connected with molded polymer joints, with white or black painted finish. Thanks to the joints, enabling the profiles to house LED sources, one can rotate 360° in order to produce a directional direct or indirect lighting, screened by an opaline diffuser in polycarbonate. Allows the enlightenment of the ambience in a versatile and a comfortable way. LED sources are dimmable.

LED

LAMPING

Source	LINEAR LED
Total power	24 + 24W
Emission	DOUBLE, DIFFUSED
Switching	dimmable 1-10V, mono switch
Tension	120V
Color temperature	3000K
Luminous flux	1420 + 1420 lm (luminous output)
Typ CRI	85
Energy class	A+
IP class	20
Dimensions	44.9" x 22.8" x .8"
Materials	aluminum + pc + abs
Notes	metal cable length 9.8' , electrical cable length 16.4' , orientable diffusers 360°, decentralized canopy
Net lamp weight	6,2 lbs

Codes	*Structure/Diffuser*
SPI LWW 52	white/white
SPI LNN 52	black/white

PACKAGE

Package 01	Dimension: 7.1" x 8.7" x 26" inches / Net weight: 6,6 lbs / Gross weight: 6.7" x 7.1" x 46.5" lbs
Package 02	Gross weight: 4 lbs

Certificazioni

Intertek

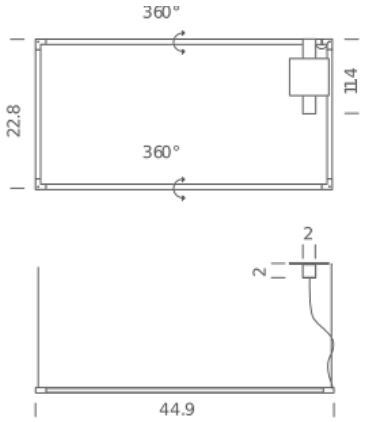

LED

LAMPING

Source	LINEAR LED
Total power	24 + 24W
Emission	DOUBLE, DIFFUSED
Switching	dimmable 1-10V, mono switch
Tension	120V
Color temperature	2700K
Luminous flux	1421 + 1420 lm (luminous output)
Typ CRI	85
Energy class	A+
IP class	20
Dimensions	44.9" x 22.8" x .8"
Materials	aluminum + pc + abs
Notes	metal cable length 9.8' , electrical cable length 16.4' , orientable diffusers 360°, decentralized canopy
Net lamp weight	6,2 lbs

Codes	*Structure/Diffuser*
SPI LWW 54	white/white
SPI LNN 54	black/white

PACKAGE

Package 01	Dimension: 7.1" x 8.7" x 26" inches / Net weight: 6,6 lbs / Gross weight: 6.7" x 7.1" x 46.5" lbs
Package 02	Gross weight: 4 lbs
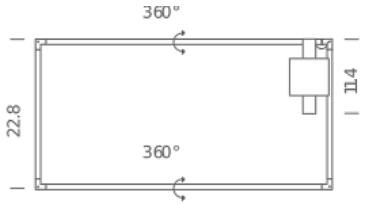
Certificazioni