ZIRKOL – C

ZIRKOL – C is a family of circular suspension lamps suitable for general and decorative lighting.
Anodized aluminium body and opal screen for a homogeneous lighting.
Available as single direct light emission version with high flux and different colour temperatures.
Driver and dimmer interface included

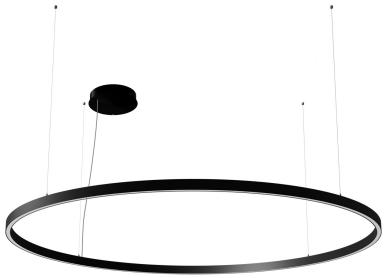

HOME 39.4" | DOWNLIGHT - 2700K

LAMPING

Source	Linear LED
Total power	45W
Emission	Diffused orientable
Switching	0-10V
Tension	110/240V
Color temperature	2700K
Luminous flux	2616lm
Typ CRI	90
IP class	IP40
Dimensions	ø39.4x1.9
Materials	Aluminum
Notes	Round canopy with 1 x driver WALIMLED100/24 | 1 x dimmer interface WDIMDALIHP | 1 x electrical cable 13.1' | 3 x adjustable metal cable (length from 9.8' to 0,16.4') (including ceiling attachment). RAL 9005 black | RAL 9016 white | shipped assembled.

Codes	*Structure*
UZRC1610G15DBO	matt white
UZRC1610G15DNE	matt black
UZRC1610G15DOR	matt gold

Certificazioni

CIRCLE HOME 39.4"



CIRCLE HOME 59"



CIRCLE 78.7



HOME 39.4" | DOWNLIGHT - 3000K

LAMPING

Source	Linear LED
Total power	45W
Emission	Diffused orientable
Switching	0-10V
Tension	110/240V
Color temperature	3000K
Luminous flux	2769lm
Typ CRI	90
IP class	40
Dimensions	ø39.4x1.9
Materials	Aluminum
Notes	Round canopy with 1 x driver WALIMLED100/24 | 1 x dimmer interface WDIMDALIHP | 1 x electrical cable 13.1' | 3 x adjustable metal cable (length from 9.8' to 0,16.4') (including ceiling attachment). RAL 9005 black | RAL 9016 white | shipped assembled.

Codes	*Structure*
UZRC1610G15WBO	matt white
UZRC1610G15WNE	matt black
UZRC1610G15WOR	matt gold

Certificazioni

Intertek

CIRCLE HOME 39.4"



CIRCLE HOME 59"



CIRCLE 78.7



HOME 39.4" | DOWNLIGHT - 4000K

LAMPING

Source	Linear LED
Total power	45W
Emission	Diffused orientable
Switching	0-10V
Tension	110/240V
Color temperature	4000K
Luminous flux	3077lm
Typ CRI	90
IP class	IP40
Dimensions	ø39.4x1.9
Materials	Aluminum
Notes	Round canopy with 1 x driver WALIMLED100/24 | 1 x dimmer interface WDIMDALIHP | 1 x electrical cable 13.1' | 3 x adjustable metal cable (length from 9.8' to 0,16.4') (including ceiling attachment). RAL 9005 black | RAL 9016 white | shipped assembled.

Codes	*Structure*
UZRC1610G15NBO	matt white
UZRC1610G15NNE	matt black
UZRC1610G15NOR	matt gold

Certificazioni

CIRCLE HOME 39.4"



CIRCLE HOME 59"



CIRCLE 78.7



HOME 39.4" | UP-DOWNLIGHT - 2700K

LAMPING

Source	Linear LED
Total power	90W
Emission	Diffused orientable
Switching	0-10V
Tension	110/240V
Color temperature	2700K
Luminous flux	5231lm
Typ CRI	90
IP class	IP40
Dimensions	ø39.4x1.9
Materials	Aluminum
Notes	Round canopy with 1 x driver WALIMLED100/24 | 1 x dimmer interface WDIMDALIHP | 1 x electrical cable 13.1' | 3 x adjustable metal cable (length from 9.8' to 0,16.4') (including ceiling attachment). RAL 9005 black | RAL 9016 white | shipped assembled

Codes	*Structure*
UZRC1710G15DBO	matt white
UZRC1710G15DNE	matt black
UZRC1710G15DOR	matt gold

Certificazioni

CIRCLE HOME 39.4"



CIRCLE HOME 59"



CIRCLE 78.7



HOME 39.4" | UP-DOWNLIGHT - 3000K

LAMPING

Source	Linear LED
Total power	90W
Emission	Diffused orientable
Switching	0-10V
Tension	110/240V
Color temperature	3000K
Luminous flux	5539lm
Typ CRI	90
IP class	IP40
Dimensions	ø39.4x1.9
Materials	Aluminum
Notes	Round canopy with 1 x driver WALIMLED100/24 | 1 x dimmer interface WDIMDALIHP | 1 x electrical cable 13.1' | 3 x adjustable metal cable (length from 9.8' to 0,16.4') (including ceiling attachment). RAL 9005 black | RAL 9016 white | shipped assembled

Codes	*Structure*
UZRC1710G15WBO	matt white
UZRC1710G15WNE	matt black
UZRC1710G15WOR	matt gold

Certificazioni

CIRCLE HOME 39.4"



CIRCLE HOME 59"



CIRCLE 78.7



HOME 39.4" | UP-DOWNLIGHT - 4000K

LAMPING

Source	Linear LED
Total power	90W
Emission	Diffused orientable
Switching	0-10V
Tension	110/240V
Color temperature	4000K
Luminous flux	6154lm
Typ CRI	90
IP class	IP40
Dimensions	ø39.4x1.9
Materials	Aluminum
Notes	Round canopy with 1 x driver WALIMLED100/24 | 1 x dimmer interface WDIMDALIHP | 1 x electrical cable 13.1' | 3 x adjustable metal cable (length from 9.8' to 0,16.4') (including ceiling attachment). RAL 9005 black | RAL 9016 white | shipped assembled

Codes	*Structure*
UZRC1710G15NBO	matt white
UZRC1710G15NNE	matt black
UZRC1710G15NOR	matt gold

Certificazioni

Intertek

CIRCLE HOME 39.4"



CIRCLE HOME 59"



CIRCLE 78.7



HOME 59" | DOWNLIGHT - 2700K

LAMPING

Source	Linear LED
Total power	68W
Emission	Diffused orientable
Switching	0-10V
Tension	110/240V
Color temperature	2700K
Luminous flux	3923lm
Typ CRI	90
IP class	IP40
Dimensions	ø59x1.9
Materials	Aluminum
Notes	Round canopy with 1 x driver WALIMLED100/24 | 1 x dimmer interface WDIMDALIHP | 1 x electrical cable 13.1' | 3 x adjustable metal cable (length from 9.8' to 0,16.4') (including ceiling attachment). RAL 9005 black | RAL 9016 white | shipped assembled

Codes	*Structure*
UZRC1615G15DBO	matt white
UZRC1615G15DNE	matt black
UZRC1615G15DOR	matt gold

Certificazioni

CIRCLE HOME 39.4"



CIRCLE HOME 59"



CIRCLE 78.7



HOME 59" | DOWNLIGHT - 3000K

LAMPING

Source	Linear LED
Total power	68W
Emission	Diffused orientable
Switching	0-10V
Tension	110/240V
Color temperature	3000K
Luminous flux	4154lm
Typ CRI	90
IP class	IP40
Dimensions	ø59x1.9
Materials	Aluminum
Notes	Round canopy with 1 x driver WALIMLED100/24 | 1 x dimmer interface WDIMDALIHP | 1 x electrical cable 13.1' | 3 x adjustable metal cable (length from 9.8' to 0,16.4') (including ceiling attachment). RAL 9005 black | RAL 9016 white | shipped assembled

Codes	*Structure*
UZRC1615G15WBO	matt white
UZRC1615G15WNE	matt black
UZRC1615G15WOR	matt gold

Certificazioni

CIRCLE HOME 39.4"



CIRCLE HOME 59"



CIRCLE 78.7



HOME 59" | DOWNLIGHT - 4000K

LAMPING

Source	Linear LED
Total power	68W
Emission	Diffused orientable
Switching	0-10V
Tension	110/240V
Color temperature	4000K
Luminous flux	4616lm
Typ CRI	90
IP class	IP40
Dimensions	ø59x1.9
Materials	Aluminum
Notes	Round canopy with 1 x driver WALIMLED100/24 | 1 x dimmer interface WDIMDALIHP | 1 x electrical cable 13.1' | 3 x adjustable metal cable (length from 9.8' to 0,16.4') (including ceiling attachment). RAL 9005 black | RAL 9016 white | shipped assembled

Codes	*Structure*
UZRC1615G15NBO	matt white
UZRC1615G15NNE	matt black
UZRC1615G15NOR	matt gold

Certificazioni

Intertek

CIRCLE HOME 39.4"



CIRCLE HOME 59"



CIRCLE 78.7



HOME 78.7" | DOWNLIGHT - 2700K

LAMPING

Source	Linear LED
Total power	90W
Emission	Diffused orientable
Switching	0-10V
Tension	110/240V
Color temperature	2700K
Luminous flux	5260lm
Typ CRI	90
IP class	IP40
Dimensions	ø78.7x1.9
Materials	Aluminum
Notes	1 x driver WALIMLED100/24 | 1 x dimmer interface WDIMDALIHP | 1 x electrical cable 16.4' | 4 x adjustable metal cable length 9.8' (including ceiling attachment). Remote driver | RAL 9005 black | RAL 9016 white | shipped in 2 pieces

Codes	*Structure*
UZRC1620G15DBO	matt white
UZRC1620G15DNE	matt black
UZRC1620G15DOR	matt gold

Certificazioni

Intertek

CIRCLE HOME 39.4"



CIRCLE HOME 59"



CIRCLE 78.7



HOME 78.7" | DOWNLIGHT - 3000K

LAMPING

Source	Linear LED
Total power	90W
Emission	Diffused orientable
Switching	0-10V
Tension	110/240V
Color temperature	3000K
Luminous flux	5539lm
Typ CRI	90
IP class	IP40
Dimensions	ø78.7x1.9
Materials	Aluminum
Notes	1 x driver WALIMLED100/24 | 1 x dimmer interface WDIMDALIHP | 1 x electrical cable 16.4' | 4 x adjustable metal cable length 9.8' (including ceiling attachment). Remote driver | RAL 9005 black | RAL 9016 white | shipped in 2 pieces

Codes	*Structure*
UZRC1620G15WBO	matt white
UZRC1620G15WNE	matt black
UZRC1620G15WOR	matt gold

Certificazioni

CIRCLE HOME 39.4"



CIRCLE HOME 59"



CIRCLE 78.7



HOME 78.7" | DOWNLIGHT - 4000K

LAMPING

Source	Linear LED
Total power	90W
Emission	Diffused orientable
Switching	0-10V
Tension	110/240V
Color temperature	4000K
Luminous flux	6154lm
Typ CRI	90
IP class	IP40
Dimensions	ø78.7x1.9
Materials	Aluminum
Notes	1 x driver WALIMLED100/24 | 1 x dimmer interface WDIMDALIHP | 1 x electrical cable 16.4' | 4 x adjustable metal cable length 9.8' (including ceiling attachment). Remote driver | RAL 9005 black | RAL 9016 white | shipped in 2 pieces

Codes	*Structure*
UZRC1620G15NBO	matt white
UZRC1620G15NNE	matt black
UZRC1620G15NOR	matt gold

Certificazioni

CIRCLE HOME 39.4"



CIRCLE HOME 59"



CIRCLE 78.7