

ARA FLOOR

Floor LED lamps composed by two elements in extruded aluminium: structure is painted in white, anthracite, champagne and moka, while the rotating illuminated structure can be glossy anodized or painted matt white or anthracite.

The LED uplight source is integrated in the upper part of the structure and it creates a widespread light, while a LED source is integrated in the main structure for a widespread and adjustable light.

The power supply and dimmer are integrated.



NEMO

www.nemolighting.com

ARA FLOOR - 1/2

LED DTW


LAMPING

| | |
|-------------------|---|
| Source | LED board + linear LED |
| Total power | 27+45W |
| Emission | up and side vertical emission, indirect |
| Switching | double, dimmable dim to warm on board |
| Tension | 120/277V |
| Color temperature | from 2200K to 3000K |
| Luminous flux | 2390lm + 3426lm |
| Typ CRI | 83 |
| Energy class | A+ |
| Materials | aluminium + PMMA |
| Notes | orientable side diffuser, up and side emission, anthracite RAL7016, champagne RAL9007 |

Codes

ARA LWW 24
ARA LXX 24
ARA LDL 24
ARA LXL 24
ARA LML 24

Certificazioni

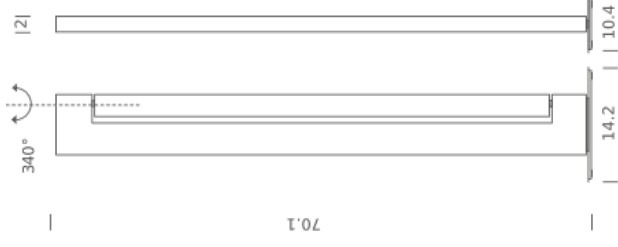

NEMO

www.nemolighting.com

ARA FLOOR - 2 / 2