


ZIRKOL – O

ZIRKOL -O is a family of oval suspension lamps suitable for general and decorative lighting.

Anodized aluminium body and opal screen for a homogeneous lighting.

Available as single direct light emission version with high flux and different colour temperatures.

Driver and dimmer interface included

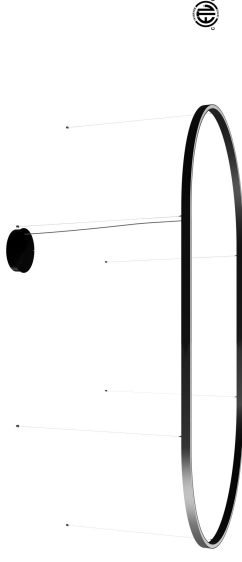

NEMO

www.nemolighting.com

ZIRKOL – O - 1 / 10

OVAL 78.7"x39.4" | DOWNLIGHT - 2700K


LAMPING

Source	Linear LED
Total power	74W
Emission	Diffused orientable
Switching	0-10V
Tension	110/240V
Color temperature	2700K
Luminous flux	4282lm
Type CRI	90
IP class	IP40
Dimensions	78.7"x39.4"x1.9"
Materials	Aluminum
Notes	Round canopy with 1 x driver WALIMLED100/24 1 x dimmer interface WDIMDALHP 1 x electrical cable 16.4' 4 x adjustable metal cable length 9.8' (including ceiling attachments). RAL 9005 black RAL 9016 white shipped assembled

Codes

UZRO16A20G15DBO
 UZRO16A20G15DNE
 UZRO16A20G15DOR

Certificazioni:

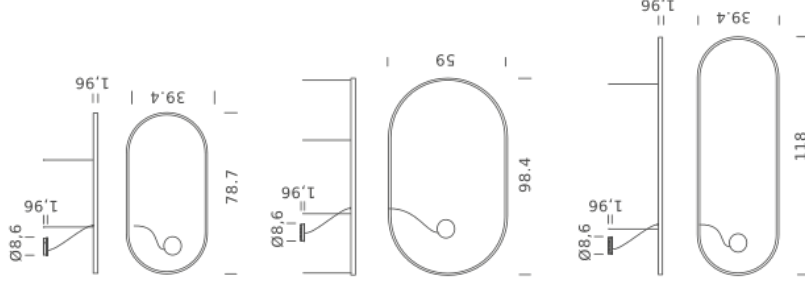

NEMO

www.nemolighting.com

ZIRKOL - O - 2 / 10

OVAL 78.7"X39.4" | DOWNLIGHT - 3000K


LAMPING

Source	Linear LED
Total power	74W
Emission	Diffused orientable
Switching	0-10V
Tension	110/240V
Color temperature	3000K
Luminous flux	4533lm
Type CRI	90
IP class	IP40
Dimensions	78.7"x39.4"x1.9"
Materials	Aluminium
Notes	Round canopy with 1 x driver WALIMLED100/24 1 x dimmer interface WDIMDALHP 1 x electrical cable 16.4' 4 x adjustable metal cable length 9.8' (including ceiling attachments). RAL 9005 black RAL 9016 white shipped assembled

Codes

UZRO16A20G15WBO
 UZRO16A20G15WNE
 UZRO16A20G15WOR

Certificazioni:

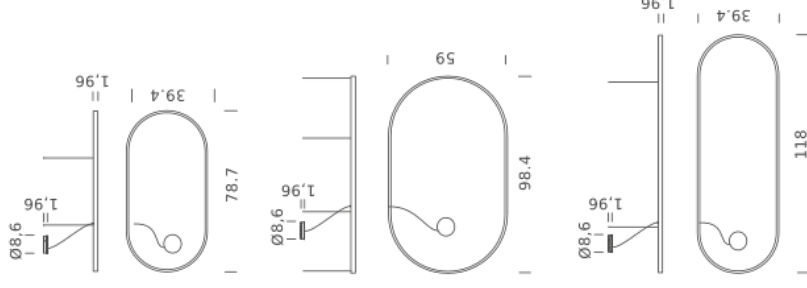

NEMO

www.nemolighting.com

ZIRKOL - O - 3 / 10

OVAL 78.7"x39.4" | DOWNLIGHT - 4000K


LAMPING

Source	Linear LED
Total power	74w
Emission	Diffused orientable
Switching	0-10V
Tension	110/240V
Color temperature	4000K
Luminous flux	5037lm
Type CRI	90
IP class	IP40
Dimensions	78.7"x39.4"x1.9"
Materials	Aluminium
Notes	Round canopy with 1 x driver WALIMLED100/24 1 x dimmer interface WDIMDALHP 1 x electrical cable 16.4' 4 x adjustable metal cable length 9.8' (including ceiling attachments). RAL 9005 black RAL 9016 white shipped assembled

Codes

UZRO16A20G15NBO
UZRO16A20G15NNE
UZRO16A20G15NOR

Certificazioni:

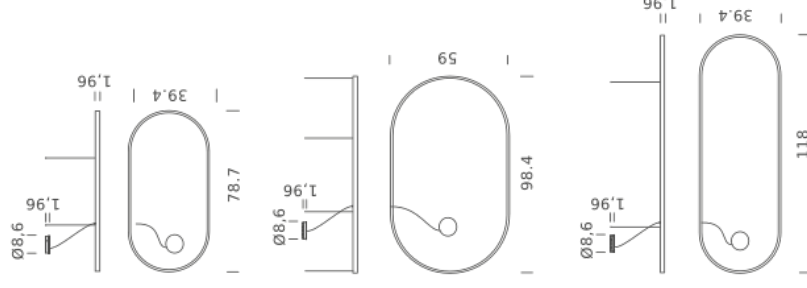

NEMO

www.nemolighting.com


ZIRKOL - O - 4 / 10

OVAL 118"X39.4" | DOWNLIGHT - 2700K

LAMPING

Source	Linear LED
Total power	98W
Emission	Diffused orientable
Switching	0-10V
Tension	110/240V
Color temperature	2700K
Luminous flux	5948lm
Type CRI	90
IP class	IP40
Dimensions	118" x 39.4" x 1.9"
Materials	Aluminum
Notes	Round canopy with 1 x driver WALIMLED100/24 1 x dimmer interface WDIMDALHP 1 x electrical cable 16.4' 4 x adjustable metal cable length 9.8' (including ceiling attachments). RAL 9005 black RAL 9016 white shipped assembled
Codes	UZRO16A30G15DBO UZRO16A30G15DNE UZRO16A30G15DOR

Certificazioni:

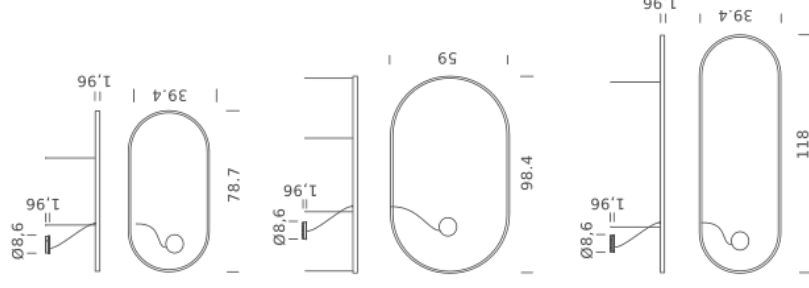

NEMO

www.nemolighting.com

ZIRKOL - O - 5 / 10

OVAL 118"X39.4" | DOWNLIGHT - 3000K


LAMPING

Source	Linear LED
Total power	98W
Emission	Diffused orientable
Switching	0-10V
Tension	110/240V
Color temperature	3000K
Luminous flux	6297lm
Typ CRI	90
IP class	IP40
Dimensions	118" x 39.4" x 1.9"
Materials	Aluminum
Notes	Round canopy with 1 x driver WALIMLED100/24 1 x dimmer interface WDIMDALHP 1 x electrical cable 16.4' 4 x adjustable metal cable length 9.8' (including ceiling attachments). RAL 9005 black RAL 9016 white shipped assembled

Codes

UZRO16A30G15WBO
UZRO16A30G15WNE
UZRO16A30G15WOR

Certificazioni:

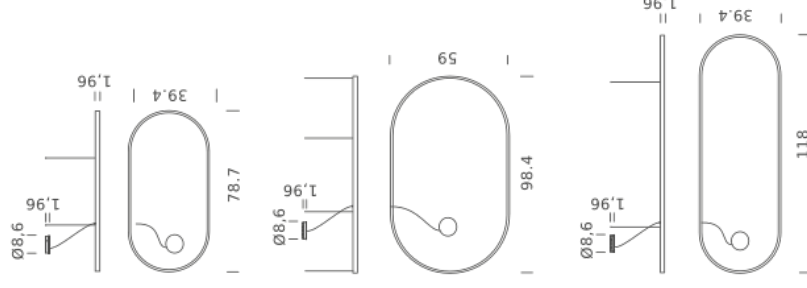

NEMO

www.nemolighting.com

ZIRKOL - O - 6 / 10

OVAL 118"X39.4" | DOWNLIGHT - 4000K


LAMPING

Source	Linear LED
Total power	98W
Emission	Diffused oriented
Switching	0-10V
Tension	110/240V
Color temperature	4000K
Luminous flux	6997lm
Typ CRI	90
IP class	IP40
Dimensions	118" x 39.4" x 1.9"
Materials	Aluminum
Notes	Round canopy with 1 x driver WALIMLED100/24 1 x dimmer interface WDIMDALHP 1 x electrical cable 16.4' 4 x adjustable metal cable length 9.8' (including ceiling attachments). RAL 9005 black RAL 9016 white shipped assembled

Codes

UZRO16A30G15NBO
UZRO16A30G15NNE
UZRO16A30G15NOR

Certificazioni:

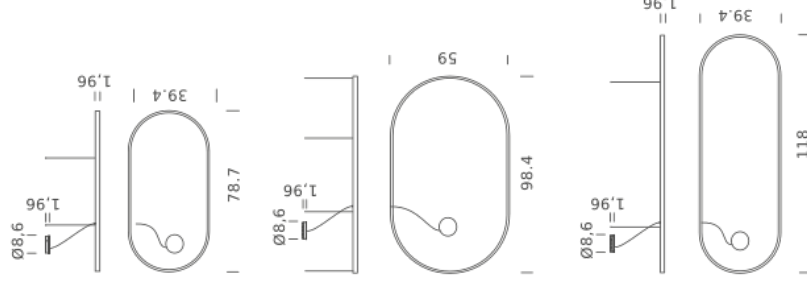

NEMO

www.nemolighting.com

ZIRKOL - O - 7 / 10

OVAL 98.4"x59" | DOWNLIGHT - 2700K


LAMPING

Source	Linear LED
Total power	97W
Emission	Diffused oriented
Switching	0-10V
Tension	110/240V
Color temperature	2700K
Luminous flux	5589lm
Type CRI	90
IP class	IP40
Dimensions	98.4"x59"x1.9"
Materials	Aluminium
Notes	Round canopy with 1 x driver WALIMLED100/24 1 x dimmer interface WDIMDALHP 1 x electrical cable 16.4' 6 x adjustable metal cable length 9.8' (including ceiling attachments). RAL 9005 black RAL 9016 white shipped in 4 pieces

Codes

UZRO16B25G15DBO
 UZRO16B25G15DNE
 UZRO16B25G15DOR

Certificazioni

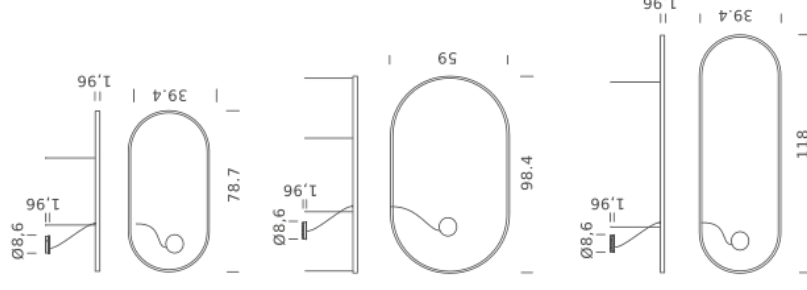

NEMO

www.nemolighting.com

ZIRKOL - O - 8 / 10

OVAL 98.4"x59" | DOWNLIGHT - 3000K


LAMPING

Source	Linear LED
Total power	97W
Emission	Diffused orientable
Switching	0-10V
Tension	110/240V
Color temperature	3000K
Luminous flux	5918lm
Type CRI	90
IP class	IP40
Dimensions	98.4"x59"x1.9"
Materials	Aluminium
Notes	Round canopy with 1 x driver WALIMLED100/24 1 x dimmer interface WDIMDALHP 1 x electrical cable 16.4' 6 x adjustable metal cable length 9.8' (including ceiling attachments). RAL 9005 black RAL 9016 white shipped in 4 pieces

Codes

UZRO16B25G15WBO
UZRO16B25G15WNE
UZRO16B25G15WOR

Certificazioni:

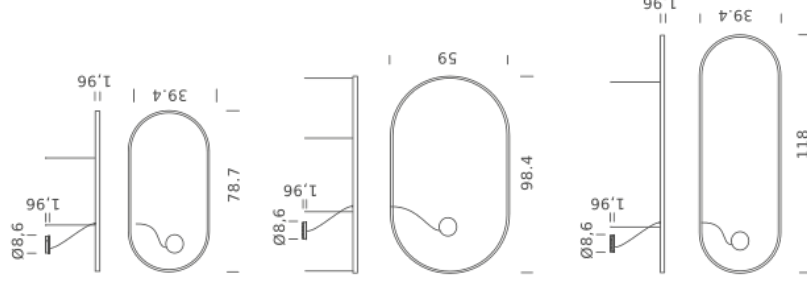

NEMO

www.nemolighting.com

ZIRKOL - O - 9 / 10

OVAL 98.4"x59" | DOWNLIGHT - 4000K


LAMPING

Source	Linear LED
Total power	97W
Emission	Diffused orientable
Switching	0-10V
Tension	110/240V
Color temperature	4000K
Luminous flux	6576lm
Type CRI	90
IP class	IP40
Dimensions	98.4"x59"x1.9"
Materials	Aluminium
Notes	Round canopy with 1 x driver WALIMLED100/24 1 x dimmer interface WDIMDALHP 1 x electrical cable 16.4' 6 x adjustable metal cable length 9.8' (including ceiling attachments). RAL 9005 black RAL 9016 white shipped in 4 pieces

Codes

UZRO16B25G15NBO
UZRO16B25G15NNE
UZRO16B25G15NOR

Certificazioni:

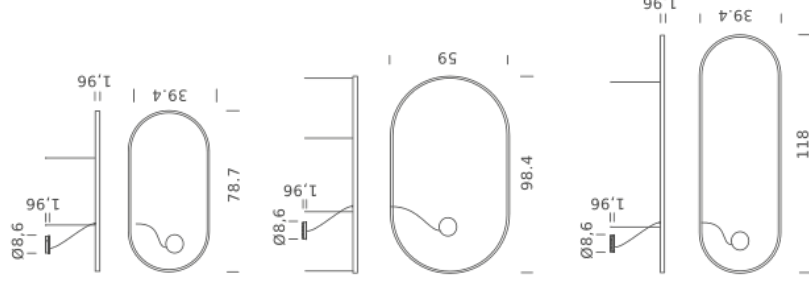

NEMO

www.nemolighting.com

ZIRKOL - O - 10 / 10