


ZIRKOL – S

ZIRKOL-S is a family of polygonal suspension lamps suitable for general and decorative lighting.

Anodized aluminium body and opal screen for a homogeneous lighting.

Available as single direct light emission version with high flux and different colour temperatures.

Driver and dimmer interface included.



NEMO


www.nemolighting.com

ZIRKOL – S - 1/7

SQUARE 59"X59" | DOWNLIGHT - 2700K

LAMPING

Source	Linear LED
Total power	77W
Emission	Diffused oriented
Switching	0-10V
Tension	110/240V
Color temperature	2700K
Luminous flux	4432lm
Type CRI	90
IP class	IP40
Dimensions	59" x 59" x 1.9"
Materials	Aluminum
Notes	Round canopy with 1 x driver WALIMLED100/24 1 x dimmer interface WDIMDALHP 1 x electrical cable 16.4' 4 x adjustable metal cable length 9.8' (including ceiling attachments). RAL 9005 black RAL 9016 white shipped assembled
Codes	UZRQ1606G15D BO UZRQ1606G15D NE UZRQ1606G15D OR
Certificazioni	 Intertek

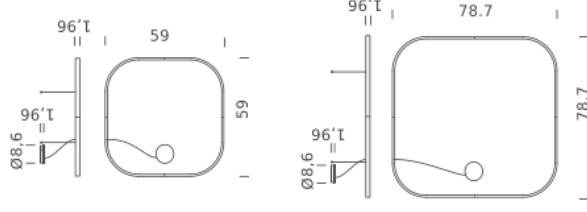

NEMO

www.nemolighting.com


ZIRKOL - S - 2/17

SQUARE 59"X59" | DOWNLIGHT - 3000K

LAMPING

Source	Linear LED
Total power	77W
Emission	Diffused orientable
Switching	0-10V
Tension	110/240V
Color temperature	3000K
Luminous flux	4692lm
Type CRI	90
IP class	IP40
Dimensions	59" x 59" x 1.9"
Materials	Aluminum
Notes	Round canopy with 1 x driver WALIMLED100/24 1 x dimmer interface WDIMDALHP 1 x electrical cable 16.4' 4 x adjustable metal cable length 9.8' (including ceiling attachments). RAL 9005 black RAL 9016 white shipped assembled
Codes	UZRQ1606G15WBO UZRQ1606G15WNE UZRQ1606G15WOR

Certificazioni:

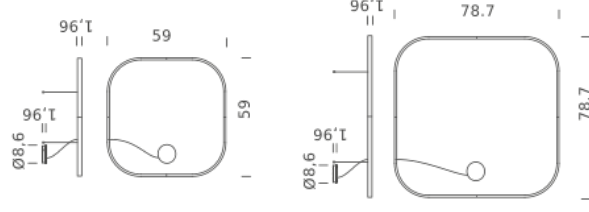

NEMO

www.nemolighting.com


ZIRKOL - S - 3 / 7

SQUARE 59"x59" | DOWNLIGHT - 4000K

LAMPING

Source	Linear LED
Total power	77W
Emission	Diffused orientable
Switching	0-10V
Tension	110/240V
Color temperature	4000K
Luminous flux	5214lm
Type CRI	90
IP class	IP40
Dimensions	59"x59"x1,9"
Materials	Aluminum
Notes	Round canopy with 1 x driver WALIMLED100/24 1 x dimmer interface WDIMDALHP 1 x electrical cable 16.4' 4 x adjustable metal cable length 9.8' (including ceiling attachments). RAL 9005 black RAL 9016 white shipped assembled
Codes	UZRQ1606G15NBO UZRQ1606G15NNE UZRQ1606G15NOR

Certificazioni:

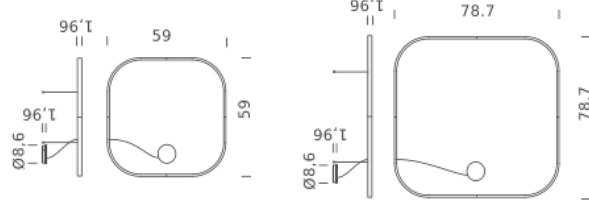

NEMO

www.nemolighting.com


ZIRKOL - S - 4 / 7

SQUARE 78.7"X78.7" | DOWNLIGHT - 2700K

LAMPING

Source	Linear LED
Total power	100W
Emission	Diffused orientable
Switching	0-10V
Tension	110/240V
Color temperature	2700K
Luminous flux	6098lm
Type CRI	90
IP class	IP40
Dimensions	78.7" x 78.7" x 1.9"
Materials	Aluminum
Notes	Round canopy with 1 x driver WALIMLED100/24 1 x dimmer interface WDIMDALHP 1 x electrical cable 16.4' 4 x adjustable metal cable length 9.8' (including ceiling attachments). RAL 9005 black RAL 9016 white shipped assembled
Codes	Structure matt white matt black matt gold
	UZRQ1608G15DBO UZRQ1608G15DNE UZRQ1608G15DOR

Certificazioni:

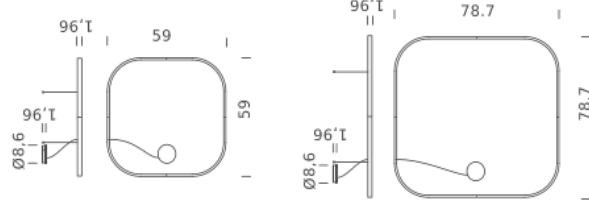

NEMO

www.nemolighting.com


ZIRKOL - S - 5 / 7

SQUARE 78.7"x78.7" | DOWNLIGHT - 3000K

LAMPING

Source	Linear LED
Total power	100W
Emission	Diffused orientable
Switching	0-10V
Tension	110/240V
Color temperature	3000K
Luminous flux	6456lm
Type CRI	90
IP class	IP40
Dimensions	78.7" x 78.7" x 1.9"
Materials	Aluminum
Notes	Round canopy with 1 x driver WALIMLED100/24 1 x dimmer interface WDIMDALHP 1 x electrical cable 16.4' 4 x adjustable metal cable length 9.8' (including ceiling attachments). RAL 9005 black RAL 9016 white shipped assembled
Codes	<p>UZRQ1608G15WBO UZRQ1608G15WNE UZRQ1608G15WOR</p>
Structure	<p>matt white matt black matt gold</p>

Certificazioni:

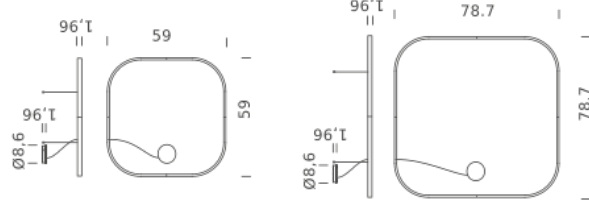

NEMO

www.nemolighting.com


ZIRKOL - S - 6/17

SQUARE 78.7"X78.7" | DOWNLIGHT - 4000K

LAMPING

Source	Linear LED
Total power	100W
Emission	Diffused orientable
Switching	0-10V
Tension	110/240V
Color temperature	4000K
Luminous flux	7174lm
Type CRI	90
IP class	IP40
Dimensions	78.7" x 78.7" x 1.9"
Materials	Aluminum
Notes	Round canopy with 1 x driver WALIMLED100/24 1 x dimmer interface WDIMDALHP 1 x electrical cable 16.4' 4 x adjustable metal cable length 9.8' (including ceiling attachments). RAL 9005 black RAL 9016 white shipped assembled
Codes	UZRQ1608G15NBO UZRQ1608G15NNE UZRQ1608G15NOR

Certificazioni:

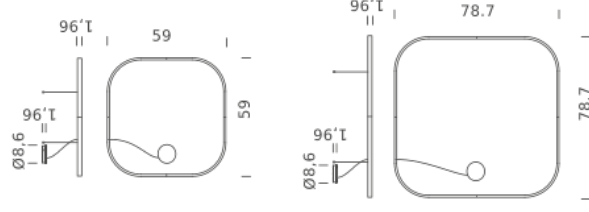

NEMO

www.nemolighting.com

ZIRKOL - S - 7/17